CO2 DRAGSTERS SPECIFICATIONS EXPLAINED

"Blink and you'll miss it"

If you are looking for a great Design and Technology project – consider

CO2 Dragsters

The purpose of the CO2 DRAGSTER competition is to provide a means for students to demonstrate their ability using Design Make Appraise (DMA) principles to draw, design and then build a dragster within a set of specifications. Dragsters are then tested on a 20-meter track for speed to determine the fastest dragster.

For further information regarding the Co2 Dragsters, Supplies and Competition Rules

Please contact: Velocity Technology School Supplies

Email info@vtss.com.au Web site http://www.vtss.com.au











CO2 DRAGSTERS SPECIFICATIONS

CONTENTS

Dragster Body
Axles / Axle Holes / Wheelbase
Spacer / Washers / Clips
Power Plant Co2 Cartridge Hole
Screw Eyes
Wheels

Specifications A to E
Specifications F to I
Specifications J to K
Specifications L to O
Specifications P to Q
Specifications R to U



DRAGSTER BODY - SPECIFICATION A to E




(A) Dragster Body Length




(B) Dragster Body Height at rear with wheels



(C) Dragster body mass /weight with wheels
No Co2 cartridge



(Dr) Dragster Body width at axles (Rail cars)




(Ds) Dragster Body width at axles (Shell cars)




(E) Dragster Body Width (including wheels)

DRAGSTER AXLES / AXLE HOLES / WHEELBASE - SPECIFICATION F to I




(F) Number of axles



(G) Bottom of axle hole above bottom of dragster



(H) Rear axle from above rear of dragster



(I) Wheelbase

Dragster Spacers / washers / Clips Specification J and K



(J) Spacer Washers




(K) Axle Clips or Similar

DRAGSTER POWER PLANT (CO2 CARTRIDGE HOLE) - SPECIFICATION L to O



(L) Power plant Depth of Hole



(M) Power Plant housing thickness3 mm around entire housing(Must not broken)




(N) Power plant housing (diameter)
Please a 19.5 mm or ¾" drill




(O) Power plant lowest point of chamber to race surface with wheels


DRAGSTER SCREW EYES - SPECIFICATION P to Q



(P) Screw eye or eyelets inside diameter



(Q) Screw eyes (2) distance apart at farthest point

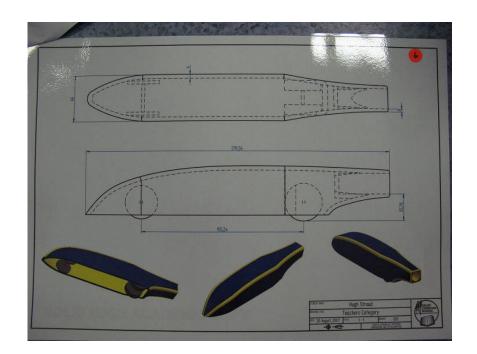

Sample drawing


DRAGSTER WHEELS - SPECIFICATION R TO U



(R) Wheels: Front Diameter



(S) Wheels: Front width at surface contact point



(T) Wheels: Rear Diameter



(U) Wheels: Rear width at surface contact point